

DYX104

German Engineering. Out of the ordinary.



Owner's Manual

English



Precautions

- Pay utmost attention if you install the DVD player into the driver's compartment.
- Use only in cars with a 12 Volt negative ground.
- Before wiring, disconnect the cable from the negative battery terminal to avoid short circuits or electrical shocks. Make the correct connections.
- Do not damage pipe or wiring when drilling holes.
- Arrange the wiring so it is not crimped or pinched by a sharp metal edge.
- Do not install the DVD player in locations which might hinder vehicle operations and do not install in locations with any moisture. Use the installation materials provided with the DVD player.
- Do not use bolts or nuts in the brake, airbags or other safety relevant systems to make ground connections.
- Attention! This DVD player is developed for motor vehicle use only.
- WARNING: DO NOT WATCH MOVIES WHILE DRIVING TO AVOID DANGER!

Warranty


12 month warranty for commercial use and 24 month warranty for private use only. The location of buying (point of purchase) must be within the EU. The proof of warranty is the original cashiers receipt with date and type of item on it. The owners manual and installation instructions must be observed. No warranty of destruction by wrong installation, wrong operation, non regulated use, using of unsuitable accessories, electrical shocks, fire, moisture or smoke, damage by improper service and cleaning. Warranty repairs are free of charge. No refund of shipping costs or labour as well as subsequent damages. Complaints and repairs do not extend the warranty period.

Environmental Reference

- Old electronic devices don't belong into the bin.
- If you want to dispose this equipment later, remove all cables and send it back to Ampire.
- You can dispose this device together with your old car, too.
 You don't have to remove it in this case.
- The packing can be recycled. Dispose the packing in a collecting system planned for it.




Front Panel



- 1) Disc Slot
- 2) Power
- 3) Play/Pause
- 4) Stop
- 5) Source (Disc/USB)
- 6) Previous
- 7) Next
- 8) Eject

Connections




- 1) Main Connector
- 2) USB Input
- 3) Yellow: +12V permanent with F3A Fuse
- 4) Red: +12V ACC with F1A Fuse
- 5) Black: GND
- 6) External Remote Sensor Input
- 7) Video Output (yellow)
- 8) Audio Output left (white)
- 9) Audio Output right (red)

Insert Batteries into Remote

- Open the battery compartment.
- Insert a "2025" battery. Make sure of right polarity.
- Close the battery compartment.
- While operating remote control, please point it to the front panel of the DVX104 or IR sensor...

Remote

- 1) Next
- 2) Play / Pause
- 3 Previous
- 4) Stop & Return
- 5) Backward
- 6) OK
- 7) Number Buttons: To enter the numbers directly
- 8) Clear: Push to clear the entered numbers
- 9) Power On / Off
- 10) AUX: No function
- 11) Forward
- 12) USB: Press 1x = USB, press again = back to DVD.
- Menu / PCB: Push to display the option menu while playing the DVD
- 14) Title: Push title to display the title menu.
- 15) Setup: Push to display the system setup menu.
- 16) Audio: Push to select the language of sound if provided.
- 17) Subtitle
- 18) Volume +
- 19) Volume -

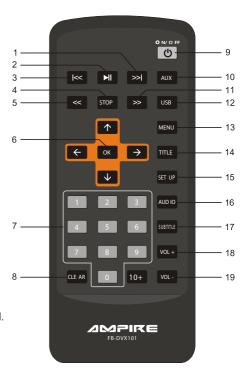


Settings

Push the Setup button to enter the system settings. Select the right menu by using the arrow buttons up, down, left and right and confirm with OK. Select the function you want to change by using the arrow buttons up and down

You can set the functions below:

Systemsettings:

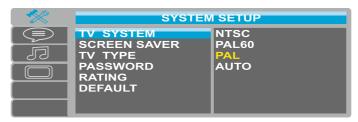

Language:



Audio:



Video Setup:



CD & DVD Playback


Insert a disc into the loader and follow the information on the screen. Use the remote like descripted on page 10 or the keys of the DVX104 (for operating the main functions) like descripted on Page 9. Push the EJECT button to remove the disc

USB Playback

Insert your USB drive into the USB connector of the player. The DVX104 will switch to USB automatically and shows the USB menu. Select the right file type (Music, Video, Photo) and start the playback by pushing the OK button of your remote. To return to the disc playback please push the USB button of your remote or the SRC button of the DVX104's front panel.

How to Deal with Disc

- Do not touch the unlabeled side of the disc.
- When there are stains on face of disc wipe gently with a wet cloth and then with a dry one.
- When a disc is grought in from a cols environment to a hot one, condensation can from on the face of the disc. Wipe down with a soft, smooth, dry cloth beforse using.
- Do not write on the unlabeled side of the disc.
- Do not use chemical solutions to clean the disc's.
- Do not stick labels or glue-based notes on the disc.
- Do not use disc's with glue residue or damaged lables.
- Do not use anti-scratching materials or covers, that were not designed for this machine.
- Do not put or store the disc directly under the sunlight, in moist or dusty environments or beside heating elements.





Technical Specifications

Playable Disc's: DVD/ USB/ SVCD/ MVCD/ MSVCD/ VCD 1.0, 2.0 (Micro Laser video/audio dics)/

CD-DA (Common Music Laser CD)/ MP3 audio Disc/ WMA/ JPG

MPEG4 Support: DivX 3.11/ 4.02/ 5.02/ 5.03/ 5.05/ DivX Pro/ XviD/ Subtitles .srt .sub

Audio Format: DOLBY digital

Signal Output: Video Signal: PAL oder NTSC

Video: 1,0Vp-p

Audio: Mix Stereo 6Vpp (2,1V RMS)

Output Interface: RCA Output

Power Voltage: 12V DC

Power Consumption: 5,8W max.

Frequency Response: DVD: 20Hz - 20kHz

Weight: 0,95kg

Product Dimension: 165x44x160mm

Content















- Remote Control
- Harness
- Brackets (2)
- Screws
- · Battery
- Audio/Video Cabel
- · Owner's Manual
- IR Remote Sensor





Since its founding in 1987 Ampire Electronics has only one goal, to provide the best possible Autoalarm-, Autohifi- and Multimedia products, which are available on the international market.

All manufacturing facilities and suppliers are certified according to ISO 9001 and QS-9000. Ampire quality products are sold worldwide.

An Ampire customer service is available in many countries. For more information about distributors in your territory please call: + 49-2181-81955-0.

We are focused on future oriented development of user friendly products. The outstanding high quality standards, functionalities and designs of our products are unique in the market. "German Development" is taken literally in AMPIRE.

Langwadener Straße 60 D-41516 Grevenbroich Email: info@ampire.de

Techical Support: Phone: 02181-81955-0 Email: support@ampire.de

www.ampire.de